

TZV SERIES

105°C Low Impedance, Lead Free Reflow Soldering.

◆ **FEATURES**

- Load Life : 105°C 2000 hours.
- Lead free reflow soldering is available.
- Available for high density mounting.
- Low impedance at 100kHz with selected materials.
- RoHS compliance.



◆ **SPECIFICATIONS**


Items	Characteristics																																
Category Temperature Range	-55~+105°C																																
Rated Voltage Range	6.3 ~50V.DC																																
Capacitance Tolerance	±20%(20°C,120Hz)																																
Leakage Current(MAX)	I=0.01CV or 3 μA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Rated Capacitance(μF) V=Rated Voltage(V)																																
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>(20°C,120Hz)</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td></td> </tr> </tbody> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	(20°C,120Hz)	tanδ	0.26	0.19	0.16	0.14	0.12	0.10																	
Rated Voltage (V)	6.3	10	16	25	35	50	(20°C,120Hz)																										
tanδ	0.26	0.19	0.16	0.14	0.12	0.10																											
Endurance	<p>After applying rated voltage with rated ripple current for 2000 hrs at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>	Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.																										
Capacitance Change	Within ±30% of the initial value.																																
Dissipation Factor	Not more than 200% of the specified value.																																
Leakage Current	Not more than the specified value.																																
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>(120Hz)</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C) /Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td></td> </tr> <tr> <td>Z(-40°C) /Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td></td> </tr> <tr> <td>Z(-55°C) /Z(20°C)</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td></td> </tr> </tbody> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	(120Hz)	Z(-25°C) /Z(20°C)	2	2	2	2	2	2		Z(-40°C) /Z(20°C)	3	3	3	3	3	3		Z(-55°C) /Z(20°C)	4	4	4	3	3	3	
Rated Voltage (V)	6.3	10	16	25	35	50	(120Hz)																										
Z(-25°C) /Z(20°C)	2	2	2	2	2	2																											
Z(-40°C) /Z(20°C)	3	3	3	3	3	3																											
Z(-55°C) /Z(20°C)	4	4	4	3	3	3																											

◆ **MULTIPLIER FOR RIPPLE CURRENT**

Frequency coefficient

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	4.7 μF	0.42	0.60	0.80	1.00
	10~33 μF	0.45	0.75	0.90	1.00
	47~100 μF	0.50	0.80	0.95	1.00
	220~1000 μF	0.60	0.85	0.95	1.00

◆ **MARKING**

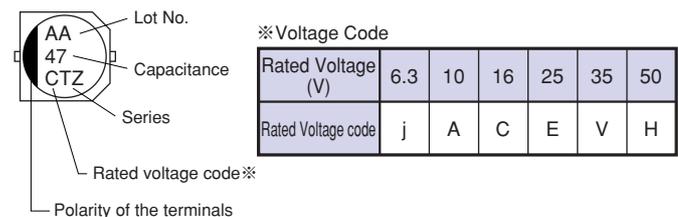


◆ **PART NUMBER**

□□□ TZV □□□□□ □ □□□ D×L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Case Size

◆ DIMENSIONS

(mm)

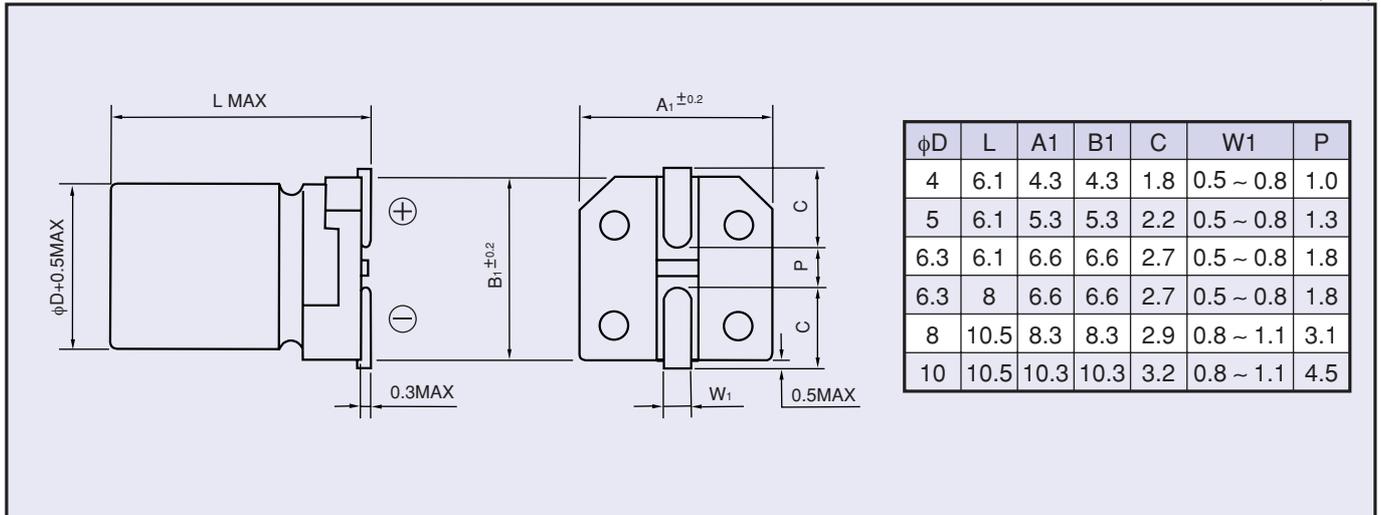

◆ STANDARD SIZE

Size φD×L(mm), Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(ΩMAX/20°C, 100kHz)

WV (V.DC) Cap(μF)	6.3 (0J)			10 (1A)			16 (1C)		
	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
10							4 × 6.1	90	1.35
22	4 × 6.1	90	1.35				4 × 6.1	90	1.35
							5 × 6.1	170	0.70
33	4 × 6.1	90	1.35				5 × 6.1	170	0.70
							5 × 6.1	170	0.70
47	4 × 6.1	90	1.35				6.3 × 6.1	250	0.36
	5 × 6.1	170	0.70				6.3 × 6.1	250	0.36
100	5 × 6.1	170	0.70				6.3 × 8	300	0.34
	6.3 × 6.1	250	0.36				6.3 × 8	300	0.34
220	6.3 × 6.1	250	0.36	6.3 × 8	300	0.34	6.3 × 8	300	0.34
	6.3 × 8	300	0.34						
330	6.3 × 8	300	0.34				8 × 10.5	600	0.16
470				8 × 10.5	600	0.16	8 × 10.5	600	0.16
680				8 × 10.5	600	0.16	10 × 10.5	850	0.08
1000	8 × 10.5	600	0.16	10 × 10.5	850	0.08			

WV (V.DC)	25 (1E)			35 (1V)			50 (1V)		
	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
4.7				4 × 6.1	90	1.45	4 × 6.1	60	2.90
10				4 × 6.1	90	1.45	5 × 6.1	85	1.52
				5 × 6.1	170	0.70	6.3 × 6.1	165	0.88
22				5 × 6.1	170	0.70	6.3 × 6.1	165	0.88
				6.3 × 6.1	250	0.36			
33	5 × 6.1	170	0.70	6.3 × 6.1	250	0.36	6.3 × 8	195	0.68
	6.3 × 6.1	250	0.36						
47	6.3 × 6.1	250	0.36	6.3 × 6.1	250	0.36	6.3 × 8	195	0.68
				6.3 × 8	300	0.34			
100	6.3 × 8	300	0.34	6.3 × 8	300	0.34	8 × 10.5	350	0.34
				8 × 10.5	600	0.16			
220	8 × 10.5	600	0.16	8 × 10.5	600	0.16	10 × 10.5	670	0.18
330	8 × 10.5	600	0.16	10 × 10.5	850	0.09			
470	10 × 10.5	850	0.09						